

HBO TAKEDOWN: TIER 2 INSTRUCTIONS





TABLE OF CONTENTS / INTRO

OVERVIEW
LAYOUT AND DIMENSIONS 4
LIST OF PARTS5
STICKERS 6
GRAPHICS
UNBOXING 8
GRAPHIC WALL ASSEMBLY
GRAPHIC APPLICATION 13-14
IPAD SETUP 15 - 17




https://brdg.co/take-down-2

This booklet includes all assembly instructions and information for HBO Max Take Down 2. Scan above QR code or enter URL to access online version.

> Contact us: 1-844-999-2734 support@brdg.co




OVERVIEW

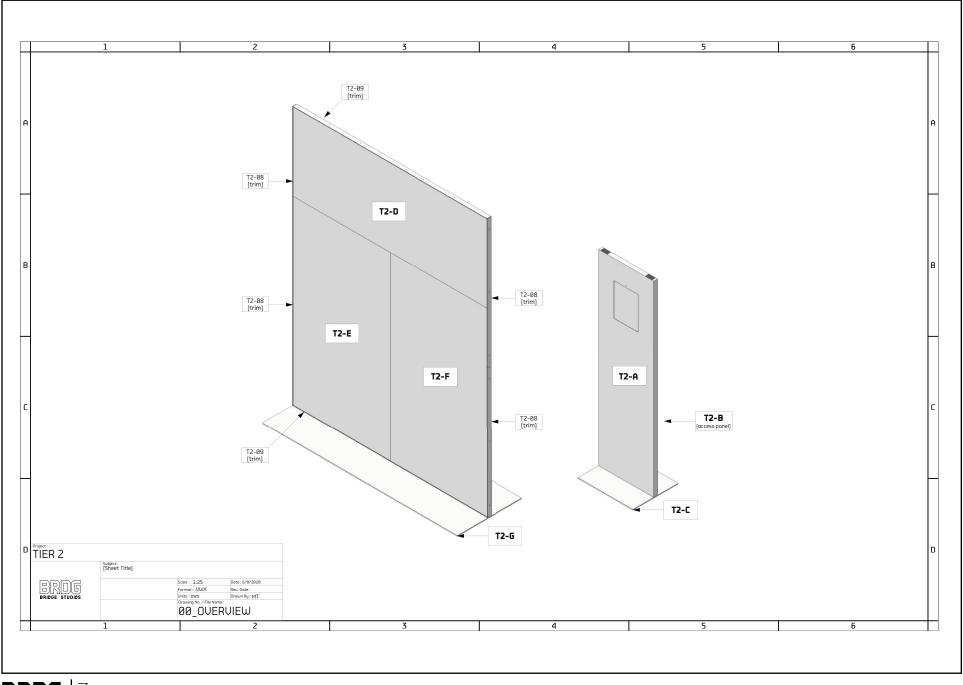

BRDG 3


LAYOUT AND DIMENSIONS

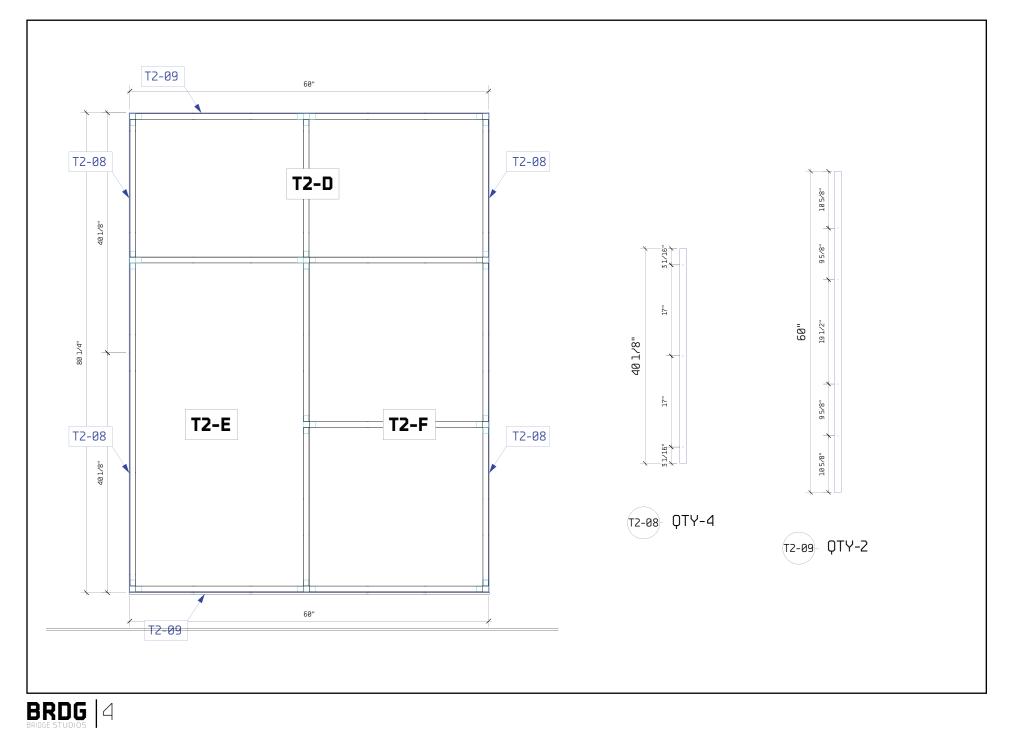

LIST OF PARTS

NAME	ТҮРЕ	 ΦΤΥ	
T2-E	LEFT HAND PANEL	1	
T2-F	RIGHT HAND PANEL	1	
T2-D	TOP PANEL	1	
T-08	SIDE TRIM	4	
T2-09	TOP AND BOTTOM TRIM	2	
HARDWARE BAG	EQUIPMENT	1	
TOOL BAG	EQUIPMENT	1	
MAGNETIC PANELS	APPLICABLE GRAPHICS	4	
CABINET	METAL FRAE THAT HOLDS IPAD	1	



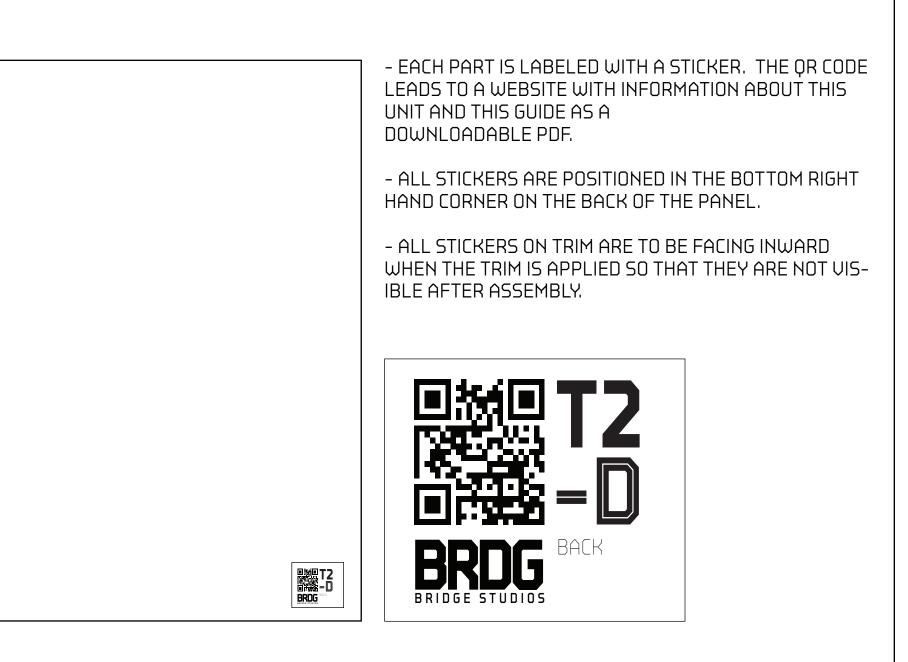







UNBOXING

1. OPEN THE ROLLING CASE AND LAY OUT ALL PARTS FLAT ON THE GROUND.

2. REFER TO PAGE 5 TO MAKE SURE NOTHING IS MISSING.

3. REMOVE GRAPHICS BUT DO NOT REMOVE THEM FROM ROLLS.

4. EACH CASE SHOULD INCLUDE A TOOL AND HARDWARE SET.





- LOCATE PARTS T2-E AND T2-F AND PUSH THEM TOGETHER HORIZONTALLY.





- FIND THE T2.09 TRIM WITH THE LARGER HOLES. ALIGN IT BETWEEN T2-E AND T2-F AND THE THE BASE PLATE SO THAT ALL HOLES MATCH UP.

- THREAD BOTH 3/8-16 X 31/2" BOLTS THROUGH THE BASE PLATE AND TRIM, INTO THE BOTTOM OF T2-E AND T2-F.

- ONCE ALL BOLTS ARE THREADED, TIGHTEN THEM WITH PHILIPS A HEAD SCREWDRIVER (ONE IS INCLUDED IF NECESSARY).





- TILT THE UNIT UPRIGHT ONTO ITS BASE.

- LOCATE PART T2.D. WITH A PERSON ON EITHER SIDE LIFT T2-D INTO THE AIR AND PUSH IT INTO THE TOPS OF T2-E AND T2-F.





- ALIGN T2-09 TRIM ALONG TOP OF UNIT AND THEN ATTACH WITH 8/32 X 1 1/2" BLACK HEX SCREWS. DO NOT TIGHTEN SCREWS UNTIL YOU ARE SURE ALL TRIM IS PROPERLY ALIGNED. WHEN READY, TIGHTEN WITH AN ALLEN WRENCH (ONE INCLUDED IF NECESSARY).

- DO THE SAME FOR ALL OF THE T2-08 SIDE TRIM.





GRAPHIC APPLICATION

- UNROLL MAGNETIC GRAPHICS. HAVE ONE PERSON HOLD UP EACH SIDE. NEVER BEND OR FOLD GRAPHICS, THEY CREASE EASILY.

- APPLY GRAPHIC STARTING FROM OUTER EDGE AND WORKING INWARD

TOWARD THE MIDDLE OF THE UNIT. KEEP ALIGNED WITH OUTER EDGES.





GRAPHIC APPLICATION

- DO THE SAME FOR THE BACK GRAPHICS. MAKE SURE THAT THE LETTERS FROM THE MIDDLE LOGO AND TEXT LINE UP PROPERLY.





IPAD SET UP

- REMOVE SCREWS FROM BACK PANEL WITH ALLEN WRENCH.
- UNLOCK THE TOP LOCK WITH A FLAT HEAD SCREW DRIVER (ONE INCLUDED IF NECESSARY).
- REMOVE BACK PANEL FROM UNIT





IPAD SET UP

- PLACE IPAD SNUGGLY BETWEEN FOAM.
- TIGHTEN CAM STRAPS UNTIL IT IS SECURE.
- REPLACE BACK PANEL. TIGHTEN SCREWS WITH ALLEN WRENCH AND RELOCK TOP.





